

# EMC Test Report




Product : Kelly KLS Sinusoidal Waveform Motor Controller  
Model Number : KLS6012NC,KLS6018NC,KLS6022NC,KLS6030NC,KLS7212NC,KS7215NC,KLS7218NC,KLS7222NC,KLS7230NC,KLS7245NC,KS7250NC,KLS7212MC,KLS7218MC;KLS6012N,KLS6018N,KLS6022N,KLS6030N,KLS7212N,KLS7215N,KLS7218N,KLS7222N,KLS7230N,KLS7245N,KLS7250N,KLS7212M,KLS7218M;KLS7218NM,KLS7212NM,KLS7260NM,KLS7280NM,KLS7210DM.KLS7212DM;KVD6012NC,KLS6018NC,KVD6022NC,KVD6030NC,KVD7212NC,KVD7215NC,KVD7218NC,KVD7222NC,KVD7230NC,KVD7245NC,KVD7250NC,KVD7212MC,KVD7218MC

Prepared for : HEFEI KELLY TECHNOLOGY INVESTMENT CO.,LTD  
Address : South Side of Hehua Road, Xincheng Developing Area, Feidong County, Hefei City, Anhui Province, China.  
Prepared By : Shenzhen ZCT Technology Co.,Ltd.  
Address : 3/F., Building 5, Hongsheng Industrial Zone, Bao'an Road, Xixiang Street, Bao'an District, Shenzhen, Guangdong, China.  
Tel : 400-805-1899  
Fax : (86) 755-23702323

Report No. : 19ZCTE041000ZER  
Date of Test : Apr.01, 2019 -Apr.10, 2019  
Date of Rep. : Apr.10, 2019


Prepared by(Engineer):



Reviewer(Quality Manager):



Approved &amp; Authorized Signer(Manager):



# 1 Contents

	Page
<b>COVER PAGE</b>	
<b>1 CONTENTS</b> .....	<b>2</b>
<b>2 TEST SUMMARY</b> .....	<b>4</b>
<b>3 GENERAL INFORMATION</b> .....	<b>5</b>
3.1 GENERAL DESCRIPTION OF EUT.....	5
<b>4 EQUIPMENTS LIST FOR ALL TEST ITEMS</b> .....	<b>6</b>
<b>5 EMISSION TEST RESULTS</b> .....	<b>7</b>
5.1 MAINS TERMINALS DISTURBANCE VOLTAGE MEASUREMENT.....	7
5.1.1 E.U.T. OPERATION.....	7
5.1.2 TEST SPECIFICATION.....	7
5.1.3 MEASUREMENT DATA.....	7
5.2 RADIATED EMISSIONS MEASUREMENT.....	8
5.2.1 E.U.T. OPERATION.....	8
5.2.2 TEST SPECIFICATION.....	8
5.2.3 MEASUREMENT DATA.....	8
5.3 HARMONICS.....	11
5.3.1 E.U.T. OPERATION.....	11
5.3.2 TEST SPECIFICATION.....	11
5.3.3 MEASUREMENT DATA.....	11
5.4 VOLTAGE CHANGES, VOLTAGE FLUCTUATIONS AND FLICKER.....	12
5.4.1 E.U.T. OPERATION.....	12
5.4.2 TEST SPECIFICATION.....	12
5.4.3 MEASUREMENT DATA.....	12
<b>6 IMMUNITY TEST RESULTS</b> .....	<b>13</b>
6.1 ELECTROSTATIC DISCHARGE IMMUNITY TEST.....	13
6.1.1 E.U.T. OPERATION.....	13
6.1.2 TEST SPECIFICATION.....	13
6.1.3 MEASUREMENT DATA.....	14
6.2 RF FIELD STRENGTH IMMUNITY TEST.....	15
6.2.1 E.U.T. OPERATION.....	15
6.2.2 TEST SPECIFICATION.....	15
6.2.3 MEASUREMENT DATA.....	16
6.3 ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST.....	17
6.3.1 E.U.T. OPERATION.....	17
6.3.2 TEST SPECIFICATION.....	17
6.3.3 MEASUREMENT DATA.....	18
6.4 SURGE IMMUNITY TEST.....	19



6.4.1 E.U.T. OPERATION.....	19
6.4.2 TEST SPECIFICATION.....	19
6.4.3 MEASUREMENT DATA.....	20
6.5 CONDUCTED DISTURBANCE IMMUNITY TEST.....	21
6.5.1 E.U.T. OPERATION.....	21
6.5.2 TEST SPECIFICATION.....	21
6.5.3 MEASUREMENT DATA.....	22
6.6 POWER FREQUENCY MAGNETIC FIELD IMMUNITY TEST.....	23
6.6.1 E.U.T. OPERATION.....	23
6.6.2 TEST SPECIFICATION.....	23
6.6.3 MEASUREMENT DATA.....	24
6.7 VOLTAGE DIPS AND INTERRUPTIONS IMMUNITY TEST.....	25
6.7.1 E.U.T. OPERATION.....	25
6.7.2 TEST SPECIFICATION.....	25
6.7.3 MEASUREMENT DATA.....	26
<b>7 APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS.....</b>	<b>27</b>



## 2 Test Summary

Test procedures according to the technical standards:

EMC Emission				
Standard	Test Item	Limit	Judgment	Remark
EN 55032:2015	Conducted Emission On AC And Telecom Port 150kHz to 30MHz	Class B	PASS	
	Radiated Emission 30MHz to 1000MHz	Class B	PASS	
	Radiated Emission 1GHz to 6GHz	Class B	N/A	NOTE (1)
EN61000-3-2:2014	Harmonic Current Emission	Class A	PASS	
EN 61000-3-3:2013	Voltage Fluctuations & Flicker	-----	PASS	
EMC Immunity				
Section	Test Item	Performance Criteria	Judgment	Remark
EN 55024:2010/A1:2015				
EN 61000-4-2:2009	Electrostatic Discharge	B	PASS	
EN 61000-4-3:2006/A2:2010	RF electromagnetic field	A	PASS	
EN 61000-4-4:2012	Fast transients	B	PASS	
EN 61000-4-5:2015	Surges	B	PASS	
EN 61000-4-6:2015	Injected Current	A	PASS	
EN 61000-4-8:2010	Power Frequency Magnetic Field	A	PASS	
EN 61000-4-11:2004	Volt. Interruptions Volt. Dips	B	PASS	



**NOTE:**

(1) If the highest frequency of the internal sources of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz.

If the highest frequency of the internal sources of the EUT is between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz.

If the highest frequency of the internal sources of the EUT is between 500 MHz and 1 GHz, measurement shall only be made up to 5 GHz.

If the highest frequency of the internal sources of the EUT is above 1 GHz, the measurement shall be made up to 5 times the highest frequency or 6 GHz, whichever is less.

(2) The power consumption of EUT is less than 75W and no Limits apply.

(3) Voltage dip: 100% reduction – Performance Criteria **B**

Voltage dip: 30% reduction – Performance Criteria **C**

Voltage Interruption: 100% Interruption – Performance Criteria **C**

(4) For client's request and manual description, the test will not be executed.

(5) "N/A" denotes test is not applicable in this Test Report

### 3 General Information

#### 3.1 General Description of EUT

Manufacturer:	HEFEI KELLY TECHNOLOGY INVESTMENT CO.,LTD
Manufacturer Address:	South Side of Hehua Road, Xincheng Developing Area, Feidong County, Hefei City, Anhui Province, China.
EUT Name:	Kelly KLS Sinusoidal Waveform Motor Controller
Brand Name:	N/A
Model No:	KLS6012NC
Attached No.:	,KLS6018NC,KLS6022NC,KLS6030NC,KLS7212NC,KLS7215NC,KLS7218NC,KLS7222NC,KLS7230NC,KLS7245NC,KLS7250NC,KLS7212MC,KLS7218MC; KLS6012N,KLS6018N,KLS6022N,KLS6030N,KLS7212N,KLS7215N,KLS7218N,KLS7222N,KLS7230N,KLS7245N,KLS7250N,KLS7212M,KLS7218M; KLS7218NM,KLS7212NM,KLS7260NM,KLS7280NM,KLS7210DM.KLS7212DM; KVD6012NC,KLS6018NC,KVD6022NC,KVD6030NC,KVD7212NC,KVD7215NC,KVD7218NC,KVD7222NC,KVD7230NC,KVD7245NC,KVD7250NC,KVD7212MC ,KVD7218MC
Power Supply Range:	Input: 24-72V
Test Power Supply:	Input: 24V



## 4 Equipments List for All Test Items

No.	Equipment	Manufacturer	Model No.	S/N	Cal date
1	EMI Test Receiver	R&S	ESCI	100612	2019-06-01
2	EMI Test Receiver	R&S	ESPI	100067	2019-06-01
3	Amplifier	HP	8447D	1937A02415	2019-06-01
4	Single Power Conductor Module	FCC	FCC-LISN-5-50-1-01-CISPR25	07118	2019-06-01
5	TRILOG Broadband Test-Antenna	SCHWARZBECK	VULB9163	9163-387	2019-06-01
6	Horn Antenna	SCHWARZBECK	BBHA9120A	B08000991-0021	2019-06-01
7	High Field Biconical Antenna	ELECTRO-METRICS	EM-6913	169	2019-06-01
8	Log Periodic Antenna	ELECTRO-METRICS	EM-6950	818	2019-06-01
9	Remote Active Vertical Antenna	ELECTRO-METRICS	EM-6892	354	2019-06-01
10	Power Clamp	SCHWARZBECK	MDS-21	3898	2019-06-01
11	Single Power Conductor Module	FCC	FCC-LISN-5-50-1-01-CISPR25	07254	2019-06-01
12	Teo Line Single Phase Module	SCHWARZBECK	NSLK8128	D-69124	2019-06-01
13	Positioning Controller	C&C	CC-C-1F	MF7802155	2019-06-01
14	Electrostatic Discharge Simulator	TESEQ	NSG437	128	2019-06-01
15	Fast Transient Burst Generator	SCHAFFNER	MODULA6150	34587	2019-06-01
16	Fast Transient Noise Simulator	Noiseken	FNS-105AX	31438	2019-06-01
17	Capacitive Coupling Clamp	TESEQ	CDN8014	25115	2019-06-01
18	Color TV Pattern Genenator	PHILIPS	PM5418	TM209966	N/A
19	Power Frequency Magnetic Field Gene	EVERFINE	EMS61000-8K	608085	2019-06-01
20	Triple-Loop Antenna	EVERFINE	LLA-2	607035	2019-06-01
21	10dB attenuator	SCHWARZBECK	MTAIMP-136	R65.90.0009	2019-06-01



## 5 Emission Test Results

### 5.1 Mains Terminals Disturbance Voltage Measurement

Frequency Range:	150kHz to 30MHz
Limits:	Table 2 of EN 55032
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximized peak within 6dB of Average Limit

#### 5.1.1 E.U.T. Operation

Operating Environment:

Temperature:	24°C	Humidity:	55% RH	Atmospheric Pressure:	101	Kpa
EUT Operation:	Normal					

#### 5.1.2 Test Specification

EUT was placed upon a wooden test table 0.8m above the horizontal metal reference plane and 0.4m from the vertical ground plane, and it was connected to an AMN. The closest distance between the boundary of the EUT and the surface of the AMN is 0.8m. All peripherals were connected to another AMN, and placed at a distance of 10cm from each other. A spectrum and receiver was connected to the RF Input Port of the AMN. Both average and quasi-peak value were detected.

Associated with the conducted emission test data in this report is a  $\pm 1.54$ dB measurement uncertainty.

#### 5.1.3 Measurement Data

An initial pre-scan was performed on the live and neutral lines.

Quasi-peak or average measurements were performed at the frequency which maximum peak emissions were detected.

Please refer to the attached quasi-peak & average measurement data for reference.

PASS



## 5.2 Radiated Emissions Measurement

Frequency Range:	30MHz to 1GHz
Measurement Distance:	3 m
Limits:	40.0 dB $\mu$ V/m between 30MHz & 230MHz
	47.0 dB $\mu$ V/m between 230MHz & 1000MHz
Detector:	Peak for pre-scan (120kHz resolution bandwidth)
	Quasi-Peak if maximum peak within 6dB of limit

### 5.2.1 E.U.T. Operation

Operating Environment:

Temperature:	24.2°C	Humidity:	54% RH	Atmospheric Pressure:	101	Kpa
EUT Operation:	Normal					

### 5.2.2 Test Specification

EUT was placed upon a wooden test table which was placed on the turn table 0.8m above the horizontal metal ground plane, and operating in the mode as mentioned above. A receiving antenna was placed 3m away from the EUT. During testing, turn around the turn table and move the antenna from 1m to 4m to find the maximum field-strength reading. All peripherals were placed at a distance of 10cm between each other. Both horizontal and vertical antenna polarities were tested.

Associated with the radiated emission test data in this report is a  $\pm 3.08$ dB measurement uncertainty.

### 5.2.3 Measurement Data


An initial pre-scan was performed in the 3m chamber using the spectrum analyzers in peak detection mode. The EUT was measured by Biology antenna with 2 orthogonal polarities and peak emissions from the EUT were detected within 6dB of the class B limit line.

The following quasi-peak measurements were performed on the EUT.






<b>EUT:</b>	Kelly KLS Sinusoidal Waveform Motor Controller	<b>Model No.:</b>	KLS6012NC
<b>Temperature:</b>	24.2°C	<b>Relative Humidity:</b>	54%
<b>Distance:</b>	3m	<b>Test Power:</b>	24V
<b>Polarization:</b>	Horizontal	<b>Test Result:</b>	Pass
<b>Standard:</b>	EN 55032 Class B	<b>Test By:</b>	King
<b>Test Mode:</b>	Normal		

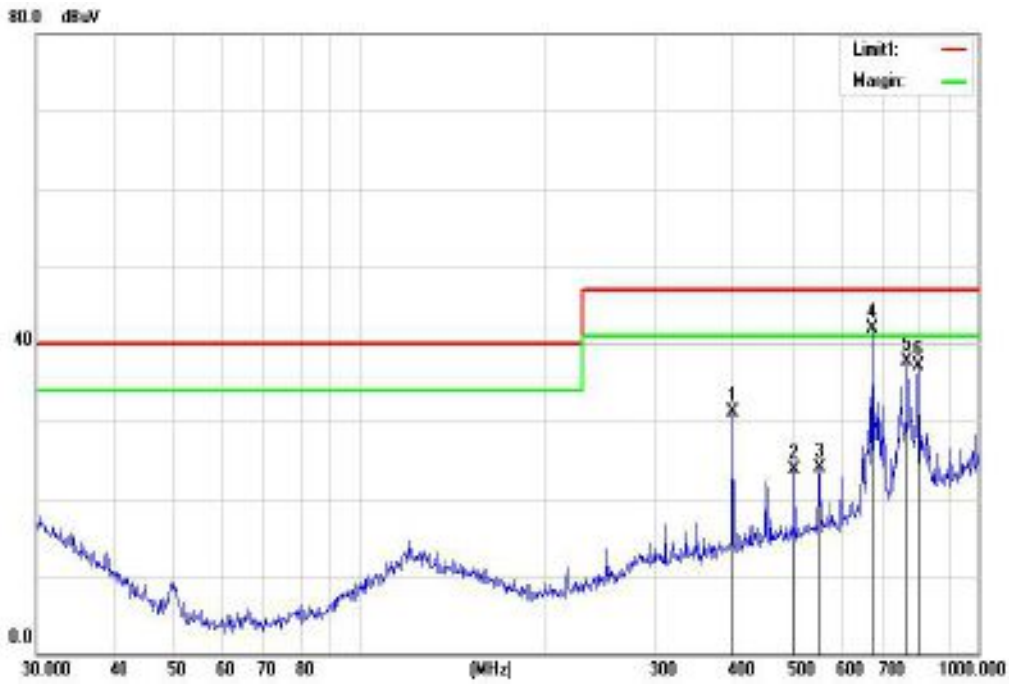

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	400.4319	43.34	-12.25	31.09	47.00	-15.91	QP
2	504.7062	35.22	-11.43	23.79	47.00	-23.21	QP
3	552.8833	34.15	-10.21	23.94	47.00	-23.06	QP
4*	672.8445	49.97	-8.09	41.88	47.00	-5.12	QP
5	768.7482	44.43	-6.75	37.68	47.00	-9.32	QP
6	801.7863	42.60	-5.57	37.03	47.00	-9.97	QP



<b>EUT:</b>	Kelly KLS Sinusoidal Waveform Motor Controller	<b>Model No.:</b>	KLS6012NC
<b>Temperature:</b>	24.2°C	<b>Relative Humidity:</b>	54%
<b>Distance:</b>	3m	<b>Test Power:</b>	24V
<b>Polarization:</b>	Vertical	<b>Test Result:</b>	Pass
<b>Standard:</b>	EN 55032 Class B	<b>Test By:</b>	King
<b>Test Mode:</b>	Normal		

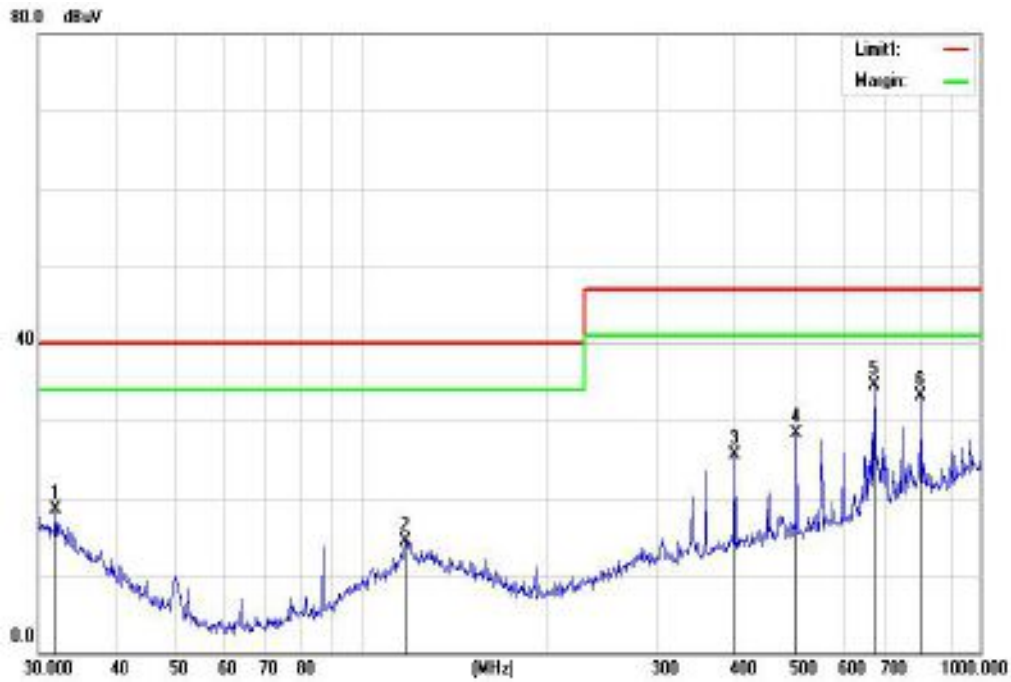

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	31.9546	28.89	-10.37	18.52	40.00	-21.48	QP
2	117.7725	28.67	-14.32	14.35	40.00	-25.65	QP
3	400.4319	37.75	-12.25	25.50	47.00	-21.50	QP
4	504.7062	39.81	-11.43	28.38	47.00	-18.62	QP
5*	672.8445	42.54	-8.09	34.45	47.00	-12.55	QP
6	801.7863	38.66	-5.57	33.09	47.00	-13.91	QP



## 5.3 Harmonics

Frequency Range:	100Hz to 2kHz
------------------	---------------

Test Requirement:	EN 61000-3-2
-------------------	--------------

### 5.3.1 E.U.T. Operation

Operating Environment:

Temperature:	24.2°C	Humidity:	56% RH	Atmospheric Pressure:	102.0	Kpa
--------------	--------	-----------	--------	-----------------------	-------	-----

EUT Operation:	Normal
----------------	--------

### 5.3.2 Test specification

EUT operated in the mode as mentioned above, and connected to Harmonic/Flicker measuring equipment which was connected to an AC power source. Measurement was performed after EUT operating in static state for 10 seconds. Each order harmonics found to meet the relevant limits.

### 5.3.3 Measurement Data

PASS



## 5.4 Voltage changes, voltage fluctuations and flicker

Test Requirement:	EN 61000-3-3
-------------------	--------------

### 5.4.1 E.U.T. Operation

Operating Environment:

Temperature:	24.1°C	Humidity:	56% RH	Atmospheric Pressure:	102.0	Kpa
--------------	--------	-----------	--------	-----------------------	-------	-----

EUT Operation:	Normal
----------------	--------

### 5.4.2 Test specification

EUT was operated in the mode as mentioned above, and connected to Harmonic/Flicker measuring equipment which was connected to an AC power source.

### 5.4.3 Measurement Data

PASS



## 6 Immunity Test Results

### 6.1 Electrostatic discharge immunity test

Acceptable Performance Criterion:	B
Discharge Impedance:	330 $\Omega$ / 150 pF
Discharge Voltage:	Air Discharge: $\pm 8$ kV
	Contact Discharge: $\pm 4$ kV
	VCP, HCP: $\pm 4$ kV
Polarity:	Positive & Negative
Minimum discharge Interval:	1 second

#### 6.1.1 E.U.T. Operation

Operating Environment:

Temperature:	24 °C	Humidity:	55% RH	Atmospheric Pressure:	101	Kpa
EUT Operation:	Normal					

#### 6.1.2 Test specification

EUT was operated in the mode as mentioned above. Both contact and air discharge was executed. Contact discharge to the conductive surfaces and to coupling planes; air discharge at insulating surfaces. Each test point shall be subjected to 10 discharges at least (For each voltage and polarity).



### 6.1.3 Measurement Data

#### Test Record

Electrostatic Discharge Immunity Test Results					
Applicant: <u>HEFEI KELLY TECHNOLOGY INVESTMENT CO.,LTD</u> EUT: Kelly KLS Sinusoidal Waveform Motor Controller M/N: <u>KLS6012NC</u> Power Supply: <u>Input: 24V</u>			Test Date: <u>Apr.10, 2019</u> Test Result: <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail Temp: <u>24</u> °C , Humi: <u>55</u> % Atmospheric Pressure: <u>101</u> Kpa		
Operating Mode	Normal			Criterion	B
Test Level	Air Discharge(A) $\pm 8$ KV , Contact Discharge (C) $\pm 4$ KV				
Test Position	Discharge Mode	Points	Discharges for each Point (for each Voltage And polarity)	Result	
Screw	A	16	10	Pass	
HCP	C	4	25	Pass	
VCP	C	4	25	Pass	
Shell	A	3	10	Pass	
Note : "A" means Air Discharge, "C" means Contact Discharge, Horizontal Coupling Plane(HCP) and Vertical Coupling plane(VCP).					



## 6.2 RF field strength immunity test

Acceptable Performance Criterion:	A
Test Level	3 V/m
Test Distance	3 m
Frequency Range	80MHz~1000MHz
Polarity:	Horizontal & Vertical

### 6.2.1 E.U.T. Operation

Operating Environment:

Temperature:	24°C	Humidity:	54% RH	Atmospheric Pressure:	101	Kpa
EUT Operation:	Normal					

### 6.2.2 Test specification

Test was executed in a fully Anechoic chamber. An antenna was used to transmit interference signal. EUT was placed upon a wooden table above the reference ground 0.8m, and was positioned so that the four sides of the EUT shall be exposed to the electromagnetic field in a sequence. In each position the performance of the EUT was investigated. A camera was used to monitor the loss of function or degradation of performance of the EUT.



### 6.2.3 Measurement Data

#### Test Record

Radiated Frequency Field Strength Immunity Test Results					
Applicant: <u>HEFEI KELLY TECHNOLOGY INVESTMENT CO.,LTD</u>			Test Date: <u>Apr.10, 2019</u>		
EUT: <u>Kelly KLS Sinusoidal Waveform Motor Controller</u>			Test Result: <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		
M/N: <u>KLS6012NC</u>			Temp: <u>24</u> °C , Humi: <u>54</u> %		
Power Supply: <u>Input: 24V</u>			Atmospheric Pressure: <u>101</u> Kpa		
Test Port	Input Port				
Operating Mode	Normal				
Test Level	<u>3</u> V/m (r.m.s) ( unmodulated )			Criterion	A
Frequency Range(MHz)	Antenna polarity	Modulation	EUT position	Result	
80~1000	Horizontal	1kHz, 80%, AM	Front	Pass	
			Rear	Pass	
			Left	Pass	
			Right	Pass	
80~1000	Vertical	1kHz, 80%, AM	Front	Pass	
			Rear	Pass	
			Left	Pass	
			Right	Pass	
Note : None					





### 6.3 Electrical fast transient/burst immunity test

Acceptable Performance Criterion:	B
Test Level:	0.5, 1.0, kV on AC Line; 0.5 kV on Signal Line
Repetition Frequency:	5 kHz
Burst Duration:	300 ms
Test Duration:	2 minutes for each level & polarity

#### 6.3.1 E.U.T. Operation

Operating Environment:

Temperature:	24°C	Humidity:	55% RH	Atmospheric Pressure:	101	Kpa
EUT Operation:	Normal					

#### 6.3.2 Test specification

EUT was placed on a metal ground reference plane and was insulated from it by a wooden support which is 0.1m thick. The ground reference plane is connected to the protective earth. The test generator and the coupling/decoupling network were placed directly on, and bonded to the ground reference plane.



### 6.3.3 Measurement Data

#### Test Record

Electrical Fast Transient/Burst Test Results			
Applicant: <u>HEFEI KELLY TECHNOLOGY INVESTMENT CO.,LTD</u>		Test Date: <u>Apr.10, 2019</u>	
EUT: <u>Kelly KLS Sinusoidal Waveform Motor Controller</u>		Test Result: <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
M/N: <u>KLS6012NC</u>		Temp: <u>24</u> °C, Humi: <u>55</u> %	
Power Supply: <u>Input: 24V</u>		Atmospheric Pressure: <u>101</u> Kpa	
Operating Mode	Normal		Criterion B
Test Signal	5/50ns, repetition frequency : <input checked="" type="checkbox"/> 5KHz / <input type="checkbox"/> 100 KHz		
Coupling Line	Test Level (KV)	Test Duration (S)	Result
L	1	120	Pass
N	1	120	Pass
PE	N/A	N/A	N/A
L+N	1	120	Pass
L+PE	N/A	N/A	N/A
N+PE	N/A	N/A	N/A
L+N+PE	N/A	N/A	N/A
DC/Signal/control Line	N/A	N/A	N/A
Note: None			



<b>6.4 Surge immunity test</b>						
Acceptable Performance Criterion:		B				
Test Level:		0.5, 1kV Live to Neutral				
		0.5, 1, 2kV Live, Neutral to Earth				
Polarity:		Positive & Negative				
Generator source impedance:		2 Ω & 12 Ω				
Trigger Mode:		Internal				
No. of surges:		5 positive & 5 negative at 0°, 90°, 180°, 270°.				
<b>6.4.1 E.U.T. Operation</b>						
Operating Environment:						
Temperature:	24.1°C	Humidity:	55% RH	Atmospheric Pressure:	101.0	Kpa
EUT Operation:	Normal					
<b>6.4.2 Test specification</b>						
<p>EUT was placed on a wooden table which is 0.8m above the ground and operated in the mode as mentioned above. The power cord between the EUT and the coupling/decoupling network was bundled so as to make it less than 2 m in length.</p>						



### 6.4.3 Measurement Data

#### Test Record

Surge Immunity Test Results					
Applicant: <u>HEFEI KELLY TECHNOLOGY INVESTMENT CO.,LTD</u>			Test Date: <u>Apr.10, 2019</u>		
EUT: <u>Kelly KLS Sinusoidal Waveform Motor Controller</u>			Test Result: <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		
M/N: <u>KLS6012NC</u>			Temp: <u>24.1 °C</u> , Humi: <u>55</u> %		
Power Supply: <u>Input: 24V</u>			Atmospheric Pressure: <u>101</u> Kpa		
Operating Mode	Normal				
Test Port	Input Port			Criterion	B
Test Signal	<input checked="" type="checkbox"/> 1.2/50 $\mu$ s <input type="checkbox"/> 10/700 $\mu$ s				
Coupling Line	Test Level (KV)	Phase	Pulse	Interval (s)	Result
L-N	1	0°~270°	10	60	Pass
L-PE	N/A	N/A	N/A	N/A	N/A
N-PE	N/A	N/A	N/A	N/A	N/A
Signal Line	N/A	N/A	N/A	N/A	N/A
Note: None					



## 6.5 Conducted disturbance immunity Test

Acceptable Performance Criterion:	A
Test Level	3 V
Frequency Range	0.150MHz~80MHz

### 6.5.1 E.U.T. Operation

Operating Environment:

Temperature:	24°C	Humidity:	55% RH	Atmospheric Pressure:	101	Kpa
EUT Operation:	Normal					

### 6.5.2 Test specification

The equipment to be tested was placed on an insulating support of 0,1m height above a ground reference Plane. The minimum distance between the EUT and all other conductive structures, except the ground reference plane is more than 0.5m. All relevant cables were provided with the appropriate coupling and decoupling devices at a distance between 0.1m and 0.3m from the projected geometry of the EUT.



### 6.5.3 Measurement Data

#### Test Record

Conducted Disturbance Immunity Test Results					
Applicant: <u>HEFEI KELLY TECHNOLOGY INVESTMENT CO.,LTD</u> EUT: <u>Kelly KLS Sinusoidal Waveform Motor Controller</u> M/N: <u>KLS6012NC</u> Power Supply: <u>Input: 24V</u>			Test Date: <u>Apr.10, 2019</u> Test Result: <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail Temp: <u>24</u> °C , Humi: <u>55</u> % Atmospheric Pressure: <u>101</u> Kpa		
Test Port	Input Port				
Operating Mode	Normal				
Test Level (V)	<u>3</u> V(r.m.f) ( unmodulated )			Criterion	A
Step Size	<u>1</u> %	Dwell Time (S)	1		
Frequency Range (MHz)	Modulation		Result		
0.15~80	1k Hz, 80%, AM		Pass		
N/A	N/A		N/A		
Note: None.					



## 6.6 Power frequency magnetic field immunity test

Acceptable Performance Criterion:	A
Test Level:	1 A/m
Coil Orientation:	X & Y & Z
Test Duration:	5 Minutes for each orientation

### 6.6.1 E.U.T. Operation

Operating Environment:

Temperature:	24°C	Humidity:	56% RH	Atmospheric Pressure:	101	Kpa
--------------	------	-----------	--------	-----------------------	-----	-----

EUT Operation: Normal

### 6.6.2 Test specification

The equipment is configured and connected to satisfy its functional requirements. It was placed on the ground reference plane with the interposition of a 0.1 m thickness wooden support and was placed in the center of the induction coil. All cables (include power cord and signal line) were exposed to the magnetic field for at least 1m of their length.



### 6.6.3 Measurement Data

#### Test Record

Power Frequency Magnetic Field Immunity Test Results				
Applicant: <u>HEFEI KELLY TECHNOLOGY INVESTMENT CO.,LTD</u>			Test Date: <u>Apr.10, 2019</u>	
EUT: <u>Kelly KLS Sinusoidal Waveform Motor Controller</u>			Test Result: <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
M/N: <u>KLS6012NC</u>			Temp: <u>24</u> °C , Humi: <u>56</u> %	
Power Supply: <u>Input: 24V</u>			Atmospheric Pressure: <u>101</u> Kpa	
Operating Mode	Normal			
Test Level	Test Duration	Coil Orientation	Criterion	Result
<u>1</u> A/m	<u>5</u> minus	X	A	Pass
<u>1</u> A/m	<u>5</u> minus	Y	A	Pass
<u>1</u> A/m	<u>5</u> minus	Z	A	Pass
Notes: None				





<b>6.7 Voltage dips and interruptions immunity test</b>						
Acceptable Performance Criterion:		B & C				
Test Level:		<5% of $U_T$ (Supply Voltage) for 0.5 and 250 Periods				
		70 % of $U_T$ (Supply Voltage) for 25 Periods				
No. of Dips / Interruptions:		3 per Level				
<b>6.7.1 E.U.T. Operation</b>						
Operating Environment:						
Temperature:	24.2°C	Humidity:	55% RH	Atmospheric Pressure:	101	Kpa
EUT Operation:	Normal					
<b>6.7.2 Test specification</b>						
<p>EUT connected to the test generator with the shortest power supply cable as specified by the EUT manufacturer. The rated voltage of the EUT was used as the basis for voltage test level specification. After each group of tests, a full functional check was performed.</p>						



### 6.7.3 Measurement Data

#### Test Record

Voltage Dips And Interruptions Test Results					
Applicant: <u>HEFEI KELLY TECHNOLOGY INVESTMENT CO.,LTD</u>			Test Date: <u>Apr.10, 2019</u>		
EUT: <u>Kelly KLS Sinusoidal Waveform Motor Controller</u>			Test Result: <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		
M/N: <u>KLS6012NC</u>			Temp: <u>24.2</u> °C , Humi: <u>55</u> %		
Power Supply: <u>Input: 24V</u>			Atmospheric Pressure: <u>101</u> Kpa		
Test Port	Input Port				
Operating Mode	Normal				
Level (%U <sub>T</sub> )	Interruption & Dips (%U <sub>T</sub> )	Duration (Cyc)	Phase	Criterion	Result
<5	>95	0.5	0°	B	Pass
70	30	25	0°	C	Pass
<5	>95	250	0°	C	Pass
Note: None.					



## 7 APPENDIX-Photographs of EUT Constructional Details



Photo 1



Photo 2

Photo 3



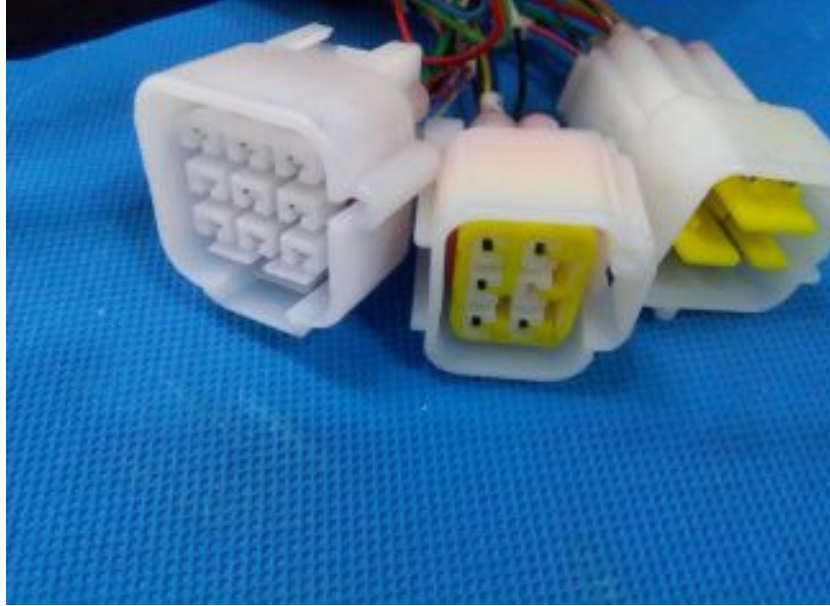


Photo 4

\*\*\*\*End of Report\*\*\*

